


Successful BulletLiner Project in Northern Arizona

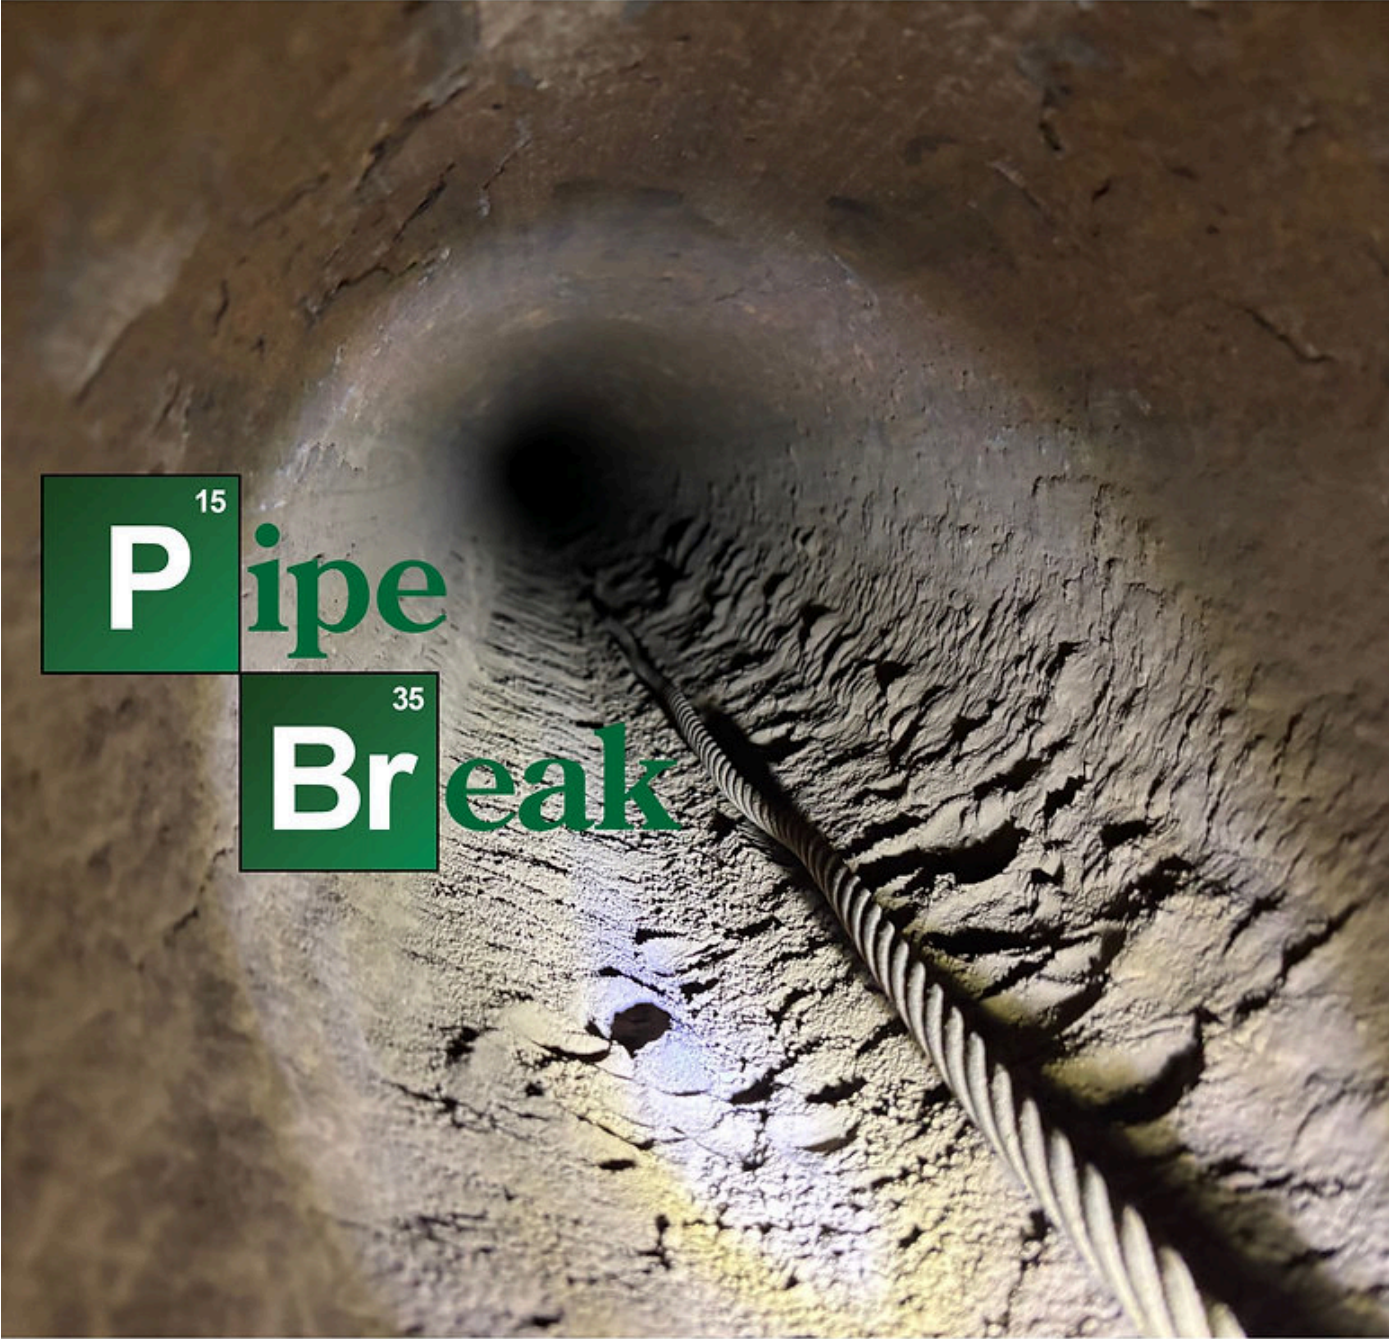

¹⁵
P

ipe

³⁵
Br

eak

Our team recently completed a 350-foot rehabilitation project on a 10-inch diameter ductile iron pipe using the H-Series in Northern Arizona-showcasing both efficiency and precision in pipeline renewal.

Before lining, we performed a thorough cleaning and CCTV inspection of the line. During this process, we identified a few obstructions and buildup, which our crew addressed to restore the pipe to optimal condition for lining. The team cleaned the line to the best achievable standard, ensuring proper surface preparation for installation.



Once the line was ready, we proceeded with the BulletLiner installation, lining all 350 feet of 10-inch pipe.



The entire lining operation was completed in just 1.5 days, and the line was ready to be returned to service the same day-minimizing downtime and disruption.

