



REVOLUTION® Access Assembly


Discover the REVOLUTION access assembly — it is the perfect solution for elevated structures and raised access points. The cover pivots away from the hole opening, eliminating the need for manually raising or lowering the cover. It rotates in either direction on a cast-in stainless steel rod that ensures it remains attached to the frame. No special tools are required to open and close.

Features

- Non-traffic rated
- Lightweight cover — easy to open, no lifting required, and takes only one person to operate
- Stainless steel rod cast in cover
- Water resistant — cover overlaps frame
- A 1/4" round neoprene gasket is secured to prevent roll out and provides odor control
- 5" frame height
- Made in the USA

Options

- Special lettering
- Watertight Level 1 (L1)
- Integrated hole for optional padlock
- EON LOCK® bolting
- Security bolting

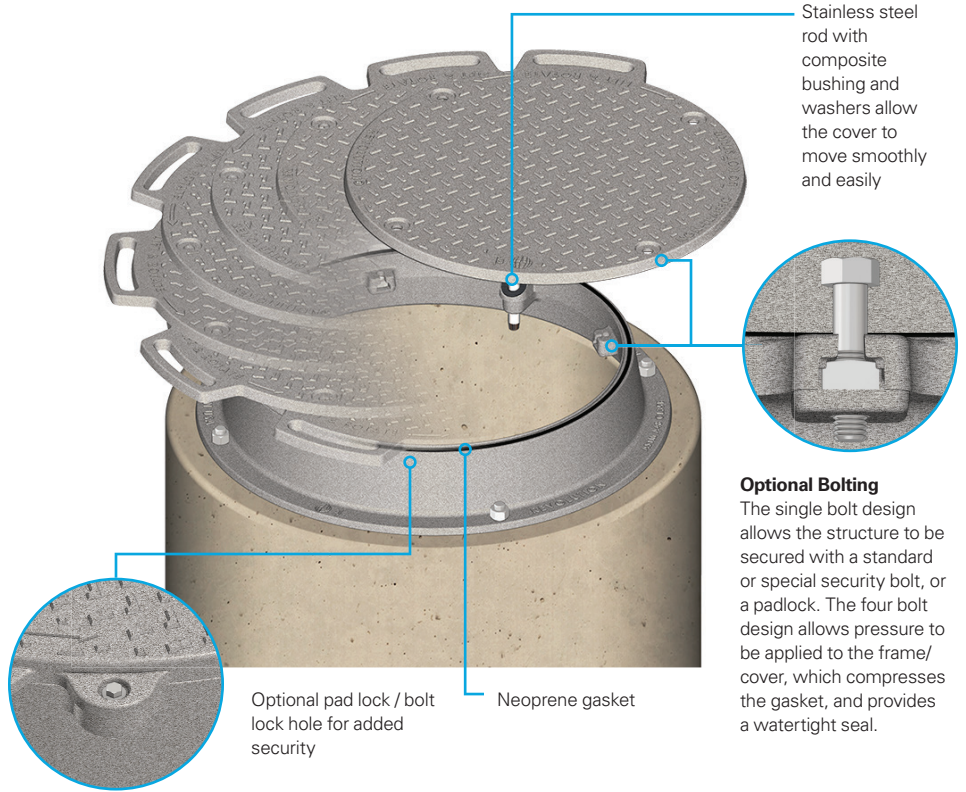

Lift and Rotate Cover



To open the cover, slightly lift and rotate the cover. The patented design provides cover lift and rotation with minimal effort. Worker safety is improved by eliminating the need to hoist heavy covers when opening or closing the elevated unit.

Resists Water Infiltration



The surface of the cover extends slightly past the edge of the frame, and the neoprene gasket helps seal the unit against water infiltration. A watertight seal can be achieved with the four bolt design.

REVOLUTION Access Assembly Sizes

Clear Opening Dia.	Series No.
24	REVO24
28	REVO28
30	REVO30

Note: All dimensions are in inches.

U.S. Patent 7,832,958

Important Safety Information

- Securely bolt the frame to manhole cone on 29 3/4" bolt circle
- Do not subject cover to any load when in open position
- Do not install in areas of vehicular traffic



Visit our YouTube Channel for videos on this and other products at www.youtube.com/AccessInfrastructure