



VERSACAM™ Security Lock

The VERSACAM security lock is a simple and robust approach for heightened security. The hidden mechanism is constructed with minimal moving parts and auto-engages upon closing the cover. It can be used on a variety of access solutions, including the ability to retrofit with existing frame installations.

- **Heightened Security** - An optional bolt (standard or security) can be used for an added layer of security. Additionally, if the bolt is not re-installed in the field, the lock will still function.
- **Built to Last** - The VERSACAM security lock is designed to last for years to come in the field with its durable components.
- **Easy Operation** - With just a few simple steps, the VERSACAM security lock is securely opened or closed. To lock the unit, simply return the cover to the seated position and the lock will automatically engage.

Standard Features


- Robust auto-engaging lock
- Fits a variety of access covers
- Threaded bolt hole for optional bolting (standard or security)
- Made in the USA

Product Application

The VERSACAM security lock can be added to a variety of frame and cover combinations including different seat thicknesses and wall configurations.

- Hinged covers, such as the ERGO® and ERGO XL® access assemblies
- Non-hinged covers, such as the 1040 access assembly
- Composite access assemblies
- Fabricated products, such as aluminum access hatches
- Retrofit with existing frame installations

*Images are intentionally blurred to obscure operating mechanism of security lock. Please contact your local sales representative for additional information.

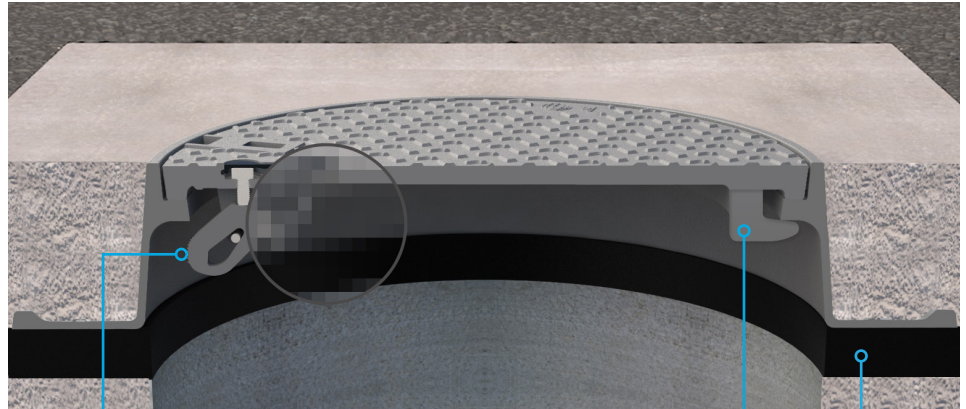

The VERSACAM security lock is a great alternative to a standard cam lock because it automatically engages when closed.


A hook lug is used on non-hinge units. Optional INFRARISER® rubber composite adjustment riser.




VERSACAM security lock in the locked position with the cap and optional security bolt in place.




VERSACAM security lock after the cap and optional security bolt are removed.

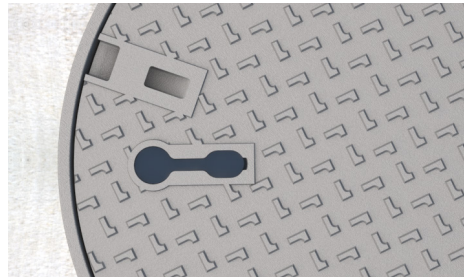


Illustrating the cap in place in the locked position.

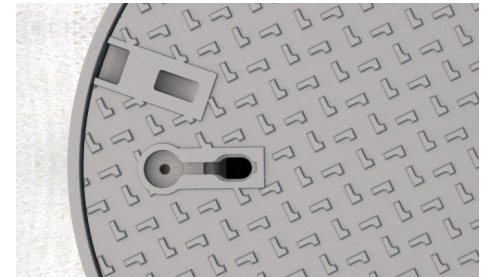

Once the cap is removed, the locking mechanism remains concealed.

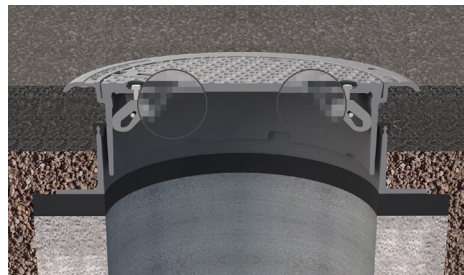

The SELFLEVEL® access assembly requires two VERSACAM security locks and security bolts.

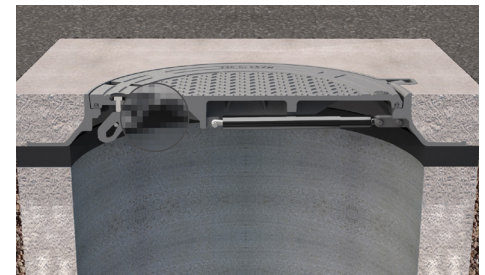

The VERSACAM security lock can be used on hinged units such as the ERGO or ERGO XL access assemblies instead of a traditional cam lock.